

316 Stainless Steel Full Port Ball Valve with Vented Ball

Description 1/4 turn, latch

1/4 turn, latch-lock, lever handle operated, CF8M stainless steel body with stainless steel vented ball and stem, 100% full port, blow-out proof stem, and 2-piece body design.

Features

- 100% full port
- Pressure rating: 1000 WOG /150 WSP
- PTFE seats and stem packing
- · Stainless steel ball & stem
- · Solid ball construction
- Latch lock handle may be locked in open or closed position
- Mounting pad for panel mount
- · Two piece design
- NPT connections

Accessories

• Can be fitted with electric or pneumatic actuator

Warranty

The Company, for a period of one year from the date of shipment, warrants each product or system of its own manufacture to the original purchaser to be free from defects in material and workmanship under normal use, service and maintenance.



T-SS-1001N-VB

Architect/Engineer approval Job Name _____ Date ____ Model Specified ____ Quantity ____ Variations Specified ____ Customer/Wholesaler ____ Contractor ____ Architect ____

Note: Information subject to change without notice.



TOLL FREE 866-204-5229 866-204-5229 • Ph. 918-317-0401 • Fax 918-317-0407 1005 E. Houston • Broken Arrow, OK 74012 www.wheatleyhvac.com



TOLL FREE 866.267.1379 • FAX 803.343.0713 932 Brookwood Drive • Columbia, SC 29201 www.mechanicalroomsupplies.com



316 Stainless Steel Full Port Ball Valve with Vented Ball

Description

1/4 turn, latch-lock, lever handle operated, CF8M stainless steel body with stainless steel vented ball and stem, 100% full port, blow-out proof stem, and 2-piece body design.

Dimension In Inches


Computer No.	Size	Α	В	C	D
100-961VB	1/4"	2.00	0.46	2.30	3.94
100-962VB	3/8"	2.00	0.49	2.30	3.94
100-963VB	1/2"	2.28	0.59	2.30	3.94
100-964VB	3/4"	2.58	0.79	2.50	4.92
100-965VB	1"	3.10	0.98	3.07	5.87
100-966VB	1-1/4"	3.54	1.26	3.27	5.87
100-967VB	1-1/2"	4.13	1.50	4.02	7.48
100-968VB	2"	4.88	1.97	4.25	7.48


Material Specification

Item	Part Name	Material Specifications		
1	Body	CF8M Stainless Steel		
2	End Adapter	CF8M Stainless Steel		
3	Vented Ball	CF8M Stainless Steel		
4	Stem	316 Stainless Steel		
5	Seat (2)	PTFE		
6	Thrust Washer	PTFE		
7	Stem Packing (2)	Hostaflon®-TFM 1600		
8	Follower Gland	304 Stainless Steel		
9	Lever Handle	304 Stainless Steel		
10	Joint Gasket	PTFE		
11	Lock Washer	304 Stainless Steel		
12	Handle Nut 304 Stainless Steel			

Pressure Rating

1000 W0G 150 WSP

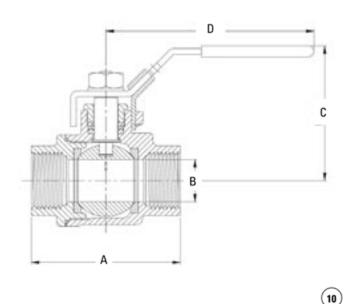

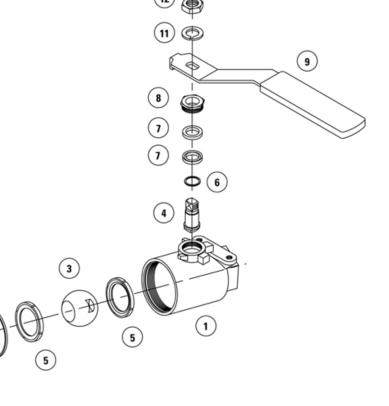

Note: Information subject to change without notice.



TOLL FREE 866-204-5229 866-204-5229 • Ph. 918-317-0401 • Fax 918-317-0407 1005 E. Houston • Broken Arrow, OK 74012 www.wheatleyhvac.com



TOLL FREE 866.267.1379 • FAX 803.343.0713 932 Brookwood Drive • Columbia, SC 29201 www.mechanicalroomsupplies.com