Lead Free Manual Balancing Valve

Fixed Orifice • Isolation Ball Valve • Memory Stop • Union • 400 WOG

Terminator B Lead Free

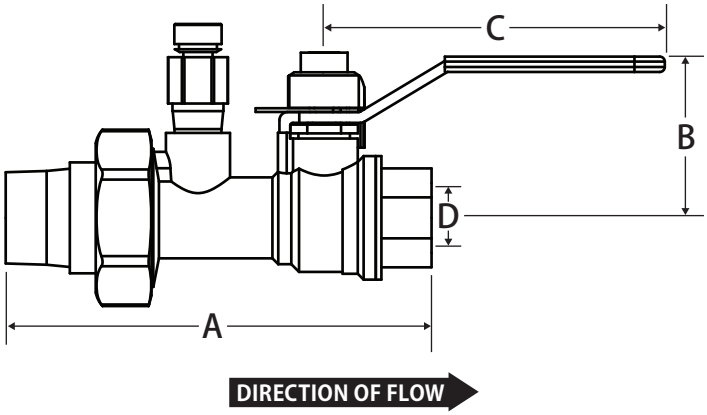

Features

- NSF 61-8 and NSF 372 Certified
- Patented removable venturi
- +/- 2% Accuracy
- Two pressure / temperature (PT) test ports
- Location tag
- Additional accessory tap
- Triple sealing stem with 2 Viton® o-rings and Teflon® seal
- Blow out proof stem
- 100% leak tested
- Made in Italy
- Leakproof stem - Lifetime warranty
- See end of catalog for pressure drop charts

Pressure and Temperature Rating

- 400 WOG
- 300°F Max

Smart Part Number Ordering Guide

TBG-ACF-XV

TBG	A	F	F	X	V

Valve Size
- A 1/2"
- B 3/4"

Body Type
- F FNPT

Tailpiece
- F FNPT

Optional

Optional Accessories
- X Extended Handle, PT Ports and Accessories
- XH Extended Handle Only
- XP Extended PT Ports / Accessories Only
- V Manual Air Vent
- AB Automatic Air Vent w/Ball Valve
- B Ball Valve Air Vent

Material Specifications

Part	Material
Body	Lead Free Brass - CW510L
End Connection	Lead Free Brass - CW510L
Ball	TEA Coated Brass -CW510L
Seat (2)	Virgin PTFE
Stem	Brass - CW510L
Packing	Virgin PTFE
Stem O-ring (2)	Viton®
Packing Gland	Brass - CW614N
Handle	Steel - Geomet® Plated
Handle Nut	Steel - Geomet® Plated
Metering Plate	Aluminum
Memory Stop	Brass - CW617N
Memory Stop Screw	Steel - Geomet® Plated
Union O-ring	Viton®
Tail Piece	Lead Free Brass - CW510L
Union Nut	Brass - CW617N
Venturi	Lead Free Brass - CW510L
Venturi O-ring	Viton®

Dimensions

Size	A*	B	C	D
1/2"	4.34	1.57	2.95	0.59
3/4"	4.88	1.57	2.95	0.59

*Length is for a SWT x MNPT valve, additional dimensions available upon request

Note: Information subject to change without notice. Prior to installation, please review the IO&M document.